

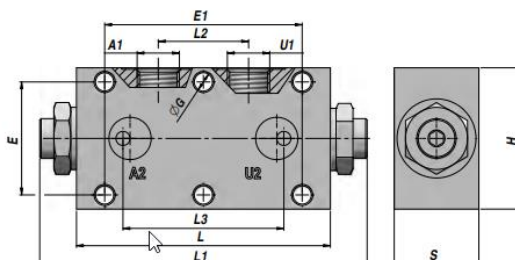


VPDE/F

VALVOLA DI BLOCCO PILOTATA (TENUTA A CONO) - DOPPIO EFFETTO
PILOT OPERATED CHECK VALVE (POPPET TYPE) - DOUBLE ACTING



Codice Code	A1-U1 BSP	A2- U2	Q MAX l/min	P MAX bar	PILOT RATIO	Tipo Type	L	L1	L2	L3	Ø G	E	E1	H	S	kg
05.VAG00.353104004 **	1/4"	ø 5	20	350	1:4	VPDE-F 010	90	113	32	52	6,5	40	70	50	30	0,43
05.VAG00.353154004 **	3/8"	ø 5	20	350	1:4	VPDE-F 015	90	113	32	52	6,5	40	70	50	30	0,43
05.VAG00.353207004	3/8"	ø 5	35	350	1:7	VPDE-F 020	96	113	32	62	6,5	40	70	60	35	0,60
05.VAG00.353257004	1/2"	ø 5	35	350	1:7	VPDE-F 025	96	113	32	62	6,5	40	70	60	35	0,60

PRESSIONE DI APERTURA - OPENING PRESSUR: BAR 0,5 - 4 (standard) – 8/Pressione di apertura - Opening pressure: bar 0,5 - 4 (standard) – 8

Pressione di apertura - Opening pressure: bar 0,5 - 4 (standard) – 8

** Tenuta a sfera - Ball type

MATERIALE CORPO: ALLUMINIO/BODY MATERIAL: ALUMINIUM

FLANGIABILE/FACE MOUNTING