


VBCD/A DE

VALVOLA OVERCENTER DOPPIO EFFETTO
OVERCENTER VALVE DOUBLE ACTING

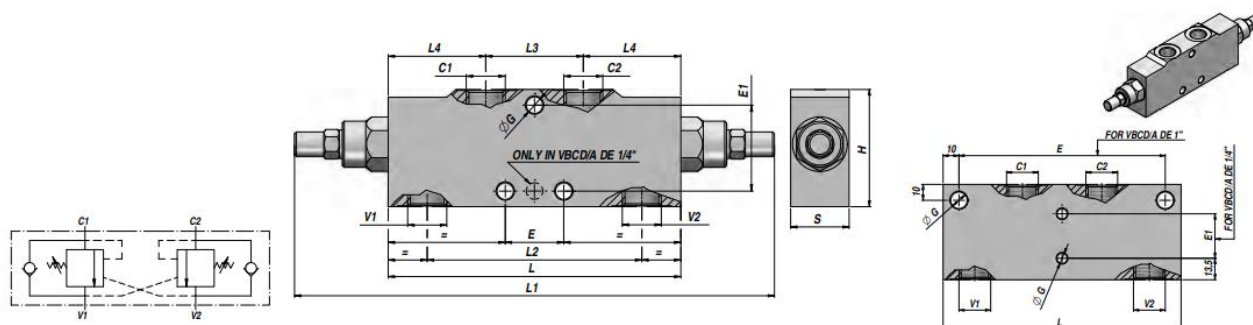

Codice Code	V1- V2 BSP	C1- C2 BSP	Q MAX l/min	P MAX bar	PILOT RATIO	Tipo Type	L	L1	L2	L3	L4	ØG	E	E1	H	S	kg
05.V2290.0A4000	1/4"	1/4"	25	350	1:4.5	VBCD/A DE 1/4"	125	255	94	38	43,5	6,5	-	28	55	30	1,69
05.V2290.0A6000	3/8"	3/8"	40	350	1:4.5	VBCD/A DE 3/8"	150	248	110	50	50,0	8,5	30	44	60	30	1,97
05.V2290.0A8000	1/2"	1/2"	60	350	1:4.5	VBCD/A DE 1/2"	150	248	110	50	50,0	8,5	30	44	60	30	1,92
05.V2290.0A1200	3/4"	3/4"	100	350	1:5.5	VBCD/A DE 3/4"	190	304	143	65	62,5	8,5	44	64	80	35	3,80
05.V2290.0A1600	1"	1"	150	350	1:5.5	VBCD/A DE 1"	210	319	158	66	72,0	10,5	190	-	90	50	6,68
05.V229A.0C1200	3/4"	3/4"	100	350	1:5.5	VBCD/A DE 3/4"	190	304	143	65	62,5	8,5	44	64	80	35	3,80

Taratura standard - Standard setting: 320 bar / Taratura minima - Minimum setting: 200 bar

MATERIALE CORPO: ACCIAIO / BODY MATERIAL: STEEL

MONTAGGIO IN LINEA / LINE MOUNTING