


VBCD/SE A CC

VALVOLA OVERCENTER
OVERCENTER VALVE

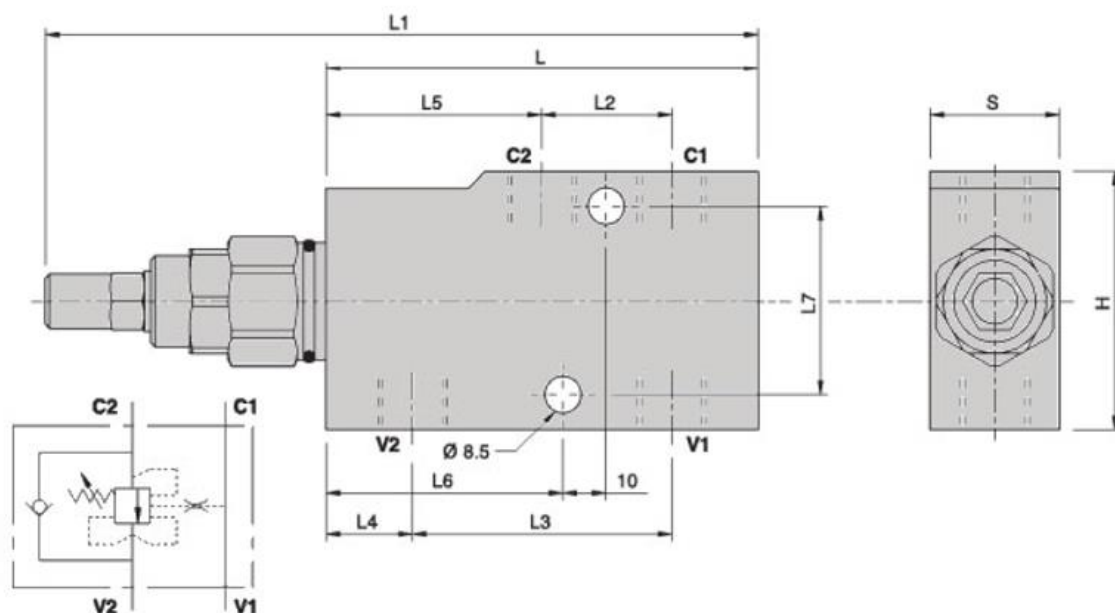

Codice Code	V1- V2 BSP	C1- C2 BSP	Q MAX l/min	P MAX bar	PILOT RATIO	Tipo Type	L	L1	L2	L3	L4	L5	L6	L7	H	S	kg
05.V219A.0C4000	1/4"	1/4"	25	350	1:4.5	VBCD/SE A CC 1/4"	76	134	26	50	14	38	41	28	55	30	1,01
05.V219A.0C6000	3/8"	3/8"	40	350	1:4.5	VBCD/SE A CC 3/8"	100	166	30	60	20	50	55	44	60	30	1,30
05.V219A.0C8000	1/2"	1/2"	60	350	1:4.5	VBCD/SE A CC 1/2"	100	166	36	65	20	50	57,5	44	60	30	1,23

Taratura standard - Standard setting: 320 bar / Taratura minima - Minimum setting: 200 bar

MATERIALE CORPO: ACCIAIO / BODY MATERIAL: STEEL

MONTAGGIO IN LINEA / LINE MOUNTING