


RS 3/T

VALVOLA A SFERA A 3 VIE - CENTRO APERTO

3-WAY BALL VALVE - OPEN CENTRE

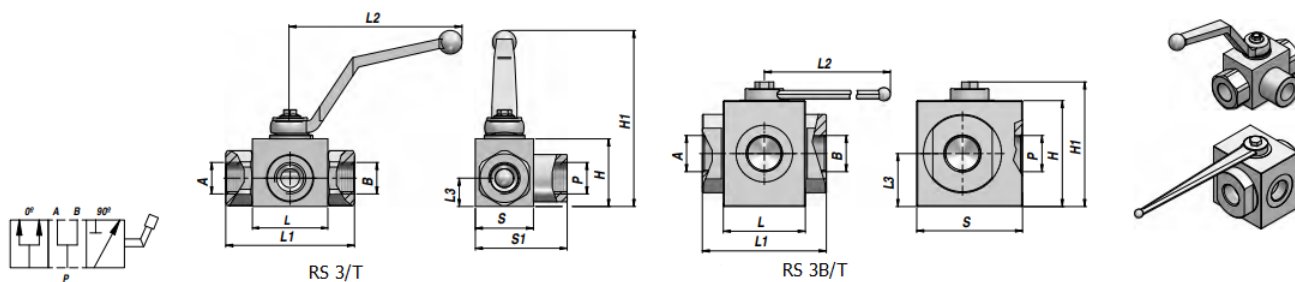

Codice Code	A-P-B BSP	Schema Scheme	Q MAX l/min	P MAX bar	Tipo Type	L	L1	L2	L3	H	H1	S	S1	kg
05.DRST0.304000	1/4"	T	25	400	RS 3/T DN 6	42,4	71	110	14,5	35	91,5	30	48,5	0,54
05.DRST0.306000	3/8"	T	35	400	RS 3/T DN10	44,4	73	110	17,4	40	96,5	35	54,5	0,70
05.DRST0.308000	1/2"	T	60	350	RS 3/T DN13	48,4	83	110	18,0	43	99,5	37	58,5	0,83
05.DRST0.312000	3/4"	T	100	400	RS 3/T DN20	62,5	95	180	23,4	57	106,5	49	75,0	1,58
05.DRST0.316000	1"	T	160	350	RS 3/T DN25	66,5	112	180	29,5	65	116,5	55	89,0	2,42
05.DRST0.320000	1"1/4-R	T	160	350	RS 3/T DN25	66,5	120	180	29,5	65	116,5	55	89,0	2,60
05.DRST0.324000	1"1/2	T	--	350	RS 3B/T DN40	85,0	131	300	53,5	107	134,5	115	-	8,63
05.DRST0.332000	2"	T	--	350	RS 3B/T DN50	98,0	140	300	57,0	114	141,5	128	-	10,61

A RICHIESTA - ON REQUEST: FORI DI FISSAGGIO - FIXING HOLES

MATERIALE CORPO: ACCIAIO/BODY MATERIAL: STEEL

MONTAGGIO IN LINEA/LINE MOUNTING

A RICHIESTA: INOX AISI 316/ON REQUEST: STAINLESS STEEL AISI 316