

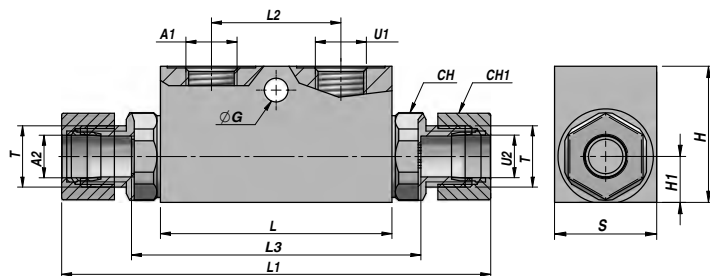


DOPPIO EFFETTO - VALVOLA DI BLOCCO PILOTATA DIN 2353 (TENUTA A CONO)
DOUBLE ACTING- PILOT OPERATED CHECK VALVE DIN 2353 (CONE SEAL)



CON DADO E ANELLO DI SERRA
WITH NUT AND CUTTING RING

Codice Code	A1-U1 BSP	A2-U2 BSP	Q MAX l/min	P MAX bar	PILOT RATIO	TIPO TYPE	OPENING PRESSURE	L	L1	L2	L3	ØG	H	S	kg
05.VSG00.324F05454	1/4"	Ø 10	20	350	1:5,5	VBPDE 1/4" L2 CEXC (V0091)	7	64	130	36	84	M8	40	30	0,64
05.VSG00.324F10454	1/4"	Ø 12	20	350	1:5,5	VBPDE 1/4" L2 CEXC (V0090)	4	64	130	36	84	M8	40	30	0,64
05.VSG00.324F15454	3/8"	Ø 12	30	350	1:5,5	VBPDE 3/8" L2 CEXC (V0135)	4	64	130	36	84	M8	40	30	0,63

MATERIALE CORPO: ACCIAIO BODY MATERIAL: STEEL
MONTAGGIO SU CILINDRO CYLINDER MOUNTING

Your need. Our speed.