


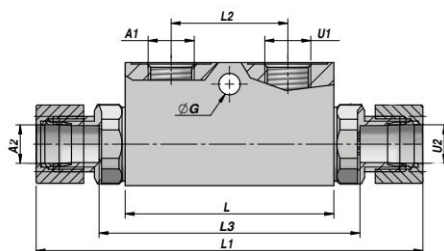


VBPDE 2 CC

DOPPIO EFFETTO - VALVOLA DI BLOCCO PILOTATA DIN 2353 (TENUTA A CONO)
DOUBLE ACTING - PILOT OPERATED CHECK VALVE DIN 2353 (POPPET TYPE)



Codice Code	A1- I1 BSP	A2- U2	Q MAX l/min	P MAX bar	PILOT RATIO	Tipo Type	Opening pressure	L	L1	L2	L3	G	H	S	kg
05.VSG00.324F14454	3/8"	Ø12	35	350	1:5,5	VBPDE 3/8" L2 CC (V0130)	3	80	150	38	96	M8	40	30	0,78
05.VSG00.324F25404	1/2"	Ø15	50	350	1:5,5	VBPDE 1/2" L2 CC (V0135)	3	90	164	45	106	M8	45	35	1,10

Your need. Our speed.

MATERIALE CORPO: ACCIAIO / BODY MATERIAL: STEEL

MONTAGGIO SU CILINDRO / CYLINDER MOUNTING