

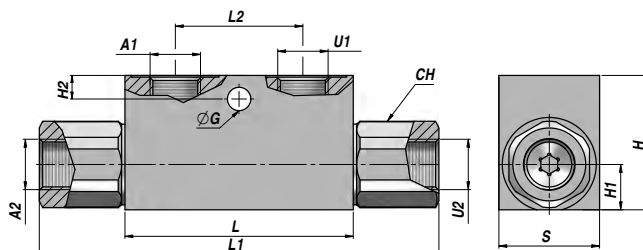


VBPSE

SEMPLICE EFFETTO - VALVOLA DI BLOCCO PILOTATA (TENUTA A CONO)
SINGLE ACTING - PILOT OPERATED CHECK VALVE (POPPET TYPE)



Codice Code	A1- U1 BSP	A2- U2 BSP	Q MAX l/min	P MAX bar	PILOT RATIO	Tipo Type	Opening pressure	L	L1	L2	H2	ØG	H	S	L3	kg
05.VSG00.311F10454	1/4"	1/4"	20	350	1:5.5	VBPSE 1/4"L (V0220)	4	64	106,5	36	8	M8	40	30	19	6,12
05.VSG00.311F15454	3/8"	3/8"	35	350	1:5.5	VBPSE 3/8"L (V0230)	3	80	120	38	8	M8	40	30	16	0,71
05.VSG00.311F20404	3/8"	3/8"	45	300	1:5	VBPSE 3/8"L (V0250)	8	90	148	45	12,5	M8	45	30	25	1,13
05.VSG00.311F25404	1/2"	1/2"	50	300	1:5	VBPSE 1/2"L (V0240)	6	90	133	45	12,5	M8	45	35	17	0,99
05.VSG00.311F30404	1/2"	1/2"	70	300	1:4	VBPSE 1/2"L (V0260)	3,5	80	134	40	18	M8	60	35	23	1,21
05.VSG00.311F40404	3/4"	3/4"	100	300	1:4	VBPSE 3/4 (V0245)	2	100	182	46	12	M8	60	40	36	1,79

MATERIALE CORPO: ACCIAIO / BODY MATERIAL: STEEL

MONTAGGIO SU CILINDRO / CYLINDER MOUNTING