


VBPDE

DOPPIO EFFETTO - VALVOLA DI BLOCCO PILOTATA (TENUTA A CONO)

DOUBLE ACTING - PILOT OPERATED CHECK VALVE (POPPET TYPE)

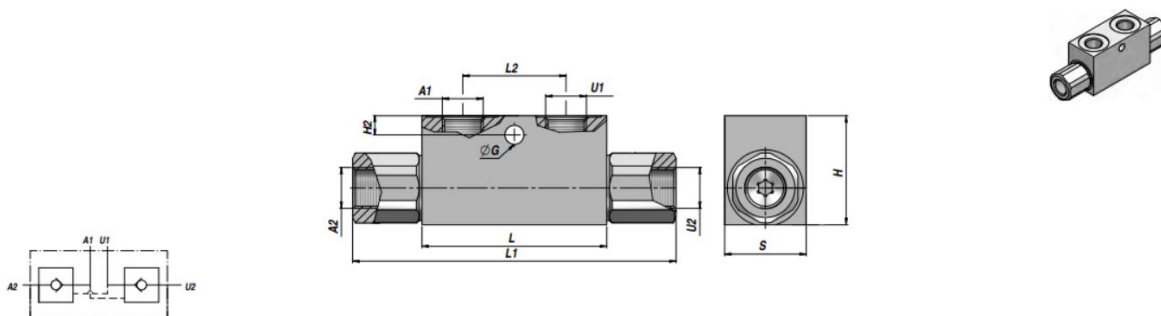

Codice Code	A1- U1 BSP	A2- U2 BSP	Q MAX l/min	P MAX bar	PILOT RATIO	Tipo Type	Opening pressure	L	L1	L2	H2	ØG	H	S	kg
05.VSG00.312F10454	1/4"	1/4"	30	350	1:5.5	VBPDE 1/4"L (V0010)	4	64	113	36,00	8	M8	40	30	0,63
05.VSG00.312F15454	3/8"	3/8"	35	350	1:5.5	VBPDE 3/8"L (V0020)	3	80	128	38	8	M8	40	30	0,74
05.VSG00.312F20404	3/8"	3/8"	45	350	1:5	VBPDE 3/8" (V0050)	8	90	156	45	12,5	M8	45	30	1,17
05.VSG00.312F25404	1/2"	1/2"	50	350	1:5	VBPDE 1/2" (V0030)	6	90	142	45	12,5	M8	45	35	1,04
05.VSG00.312F30404	1/2"	1/2"	80	350	1:4	VBPDE 1/2" (V0070)	3,5	80	144	40	18	M8	60	35	1,28
05.VSG00.312F40404	3/4"	3/4"	120	350	1:4	VBPDE 3/4" (V0040)	2	100	192	46	12	M8	60	40	1,92

MATERIALE CORPO: ACCIAIO / BODY MATERIAL: STEEL

MONTAGGIO SU CILINDRO / CYLINDER MOUNTING