


VU

VALVOLA UNIDIREZIONALE (TENUTA A SFERA)

CHECK VALVE (POPPET TYPE)

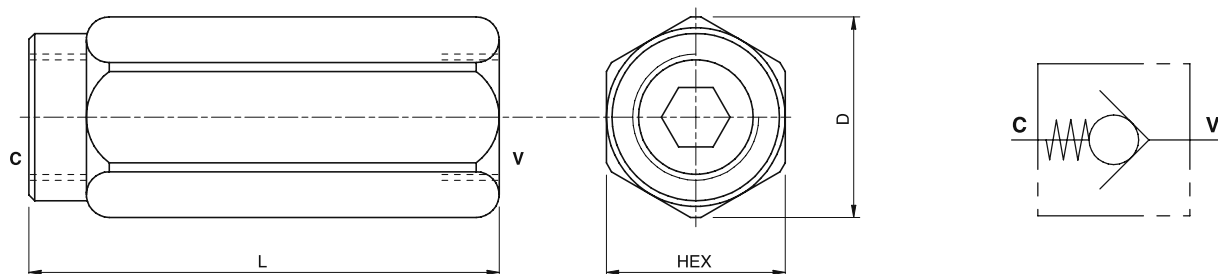

Codice Code	V- C BSP	Q MAX l/min	P MAX bar	Tipo Type	L	ØD	HEX	kg
05.VSG30.3C1000	1/4"	20	350	VU (V0590)	62	21	19	0,10
05.VSG30.3C2000	3/8"	50	400	VU (V0600)	68	26,5	24	0,18
05.VSG30.3C3000	1/2"	90	350	VU (V0610)	77	34	30	0,31
05.VSG30.3C4000	3/4"	130	300	VU (V0620)	88	40	36	0,49
05.VSG30.3C5000	1"	180	270	VU (V0630)	105	46	41	0,68
05.VSG30.3C6000	1"1/4	250	250	VU (V0631)	135	63	55	1,65
05.VSG30.3C7000	1"1/2	380	200	VU (V0632)	145	69	60	1,95

Pressione di apertura - Opening pressure: bar 0.5 (Standard) - 4 – 8

MATERIALE CORPO: ACCIAIO

BODY MATERIAL: STEEL

MONTAGGIO IN LINEA

LINE MOUNTING

MOLLE - SPRINGS

codice code	0,4/0,7 Bar	1 Bar	3 Bar	5 Bar	8 Bar
VU 1/4"	V0590			90/5	V0590/8
VU 3/8"	V0600			00/5	V0600/8
VU 1/2"	10	V0 10/1	V0610/3	V0610/5	V0610/8
VU 3/4"	V0620			20/5	V0620/8
VU 1"	V0630	V0630/1	V0630/3	V0630/5	V0630/8
VU 1" 1/4"	/	V0631	V0631/3	V0631/5	V0631/8
VU 1" 1/2"	/	V0632	V0632/3	V0632/5	V0632/8
VU 2"	V0633	/	/	/	/