



VRF

VALVOLA DI STROZZAMENTO REGOLABILE (TENUTA A CONO)

ADJUSTABLE THROTTLE - CHECK VALVE (POPPET TYPE)

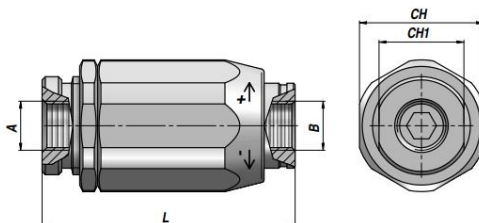

Codice Code	A BSP	B BSP	Q MAX l/min	P MAX bar	Tipo Type	L	CH	CH1	kg
05.VSG51.210000	1/4"	1/4"	30	300	VRF V0540	66.0	30	19	0,274
05.VSG51.220000	3/8"	3/8"	45	300	VRF V0550	73	32	24	0,330
05.VSG51.230000	1/2"	1/2"	80	350	VRF V0560	80	27	42	0,484
05.VSG51.240000	3/4"	3/4"	110	300	VRF V0570	95	46	32	0,824
05.VSG51.250000	1"	1"	160	250	VRF V0580	118.5	65	46	2,15
05.VSG51.260000	1"1/4	1"1/4	210	230	VRF V0578	135	80	55	3,31
05.VSG51.270000	1"1/2	1"1/2	280	230	VRF V0579	149.5	90	62	4,76

MATERIALE CORPO: ACCIAIO / BODY MATERIAL: STEEL

MONTAGGIO IN LINEA / LINE MOUNTING

UNIDIREZIONALE / UNIDIRECTIONAL