


GE DO

SNODO SFERICO RADIALE RICHIEDENTE MANUTENZIONE

RADIAL BALL-JOINT REQUIRING MAINTENANCE

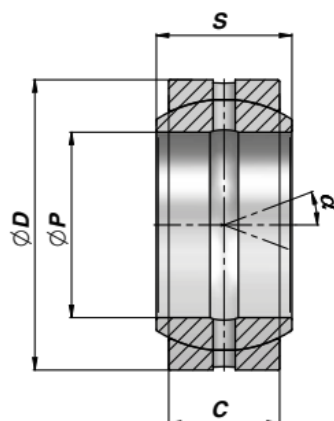

TYPE DO

Codice Code Type DO	ØP	ØD	S	C	α	FC (kN)	kg
*05.CGE00.0100000	10	19	9	6	12	8.15	0.01
*05.CGE00.0120000	12	22	10	7	11	10.80	0,01
05.CGE00.0150000	15	26	12	9	8	17.00	0,02
05.CGE00.0160000(A)	16	30	14	10	10	21.20	0,03
05.CGE00.0170000	17	30	14	10	10	21.20	0,04
05.CGE00.0200000	20	35	16	12	9	30.00	0,06
05.CGE00.0250000	25	42	20	16	7	48.00	0,11
05.CGE00.0300000	30	47	22	18	6	62.00	0,14
05.CGE00.0350000	35	55	25	20	6	80.00	0,22
05.CGE00.0400000	40	62	28	22	7	100.00	0,30
05.CGE00.0450000	45	68	32	25	7	127.00	0,40
05.CGE00.0500000	50	75	35	28	6	156.00	0,54
05.CGE00.0600000	60	90	44	36	6	245.00	1,00
05.CGE00.0700000	70	105	49	40	6	315.00	1,50
05.CGE00.0800000	80	120	55	45	6	400.00	2,20
05.CGE00.0900000	90	130	60	50	5	490.00	2,70
05.CGE00.1000000	100	150	70	55	7	610.00	4,30
05.CGE00.1100000	110	160	70	55	6	655.00	4,70
05.CGE00.1200000	120	180	85	70	6	950.00	8,00
05.CGE00.1400000	140	210	90	70	7	1080.00	11.00
05.CGE00.1600000	160	230	105	80	8	1370.00	13.50
05.CGE00.1800000	180	260	105	80	6	1530.00	18.50
05.CGE00.2000000	200	290	130	100	7	2120.00	28.00

FC = CARICO DINAMICO AMMESSO - MAX DYNAMIC LOAD

* = NON RILUBRIFICABILE - WITHOUT GREASE NIPPLE / (A) = FUORI NORMATIVA - OUT OF RULE

ACCOPIAMENTO - COUPLING: ACCIAIO/ACCIAIO - STEEL/STEEL

MATERIALE: ACCIAIO ISO 12240-1 SERIE E / MATERIAL: STEEL ISO 12240-1 SERIES E