


GE FO

SNODO SFERICO RADIALE RICHIEDENTE MANUTENZIONE

RADIAL BALL-JOINT REQUIRING MAINTENANCE

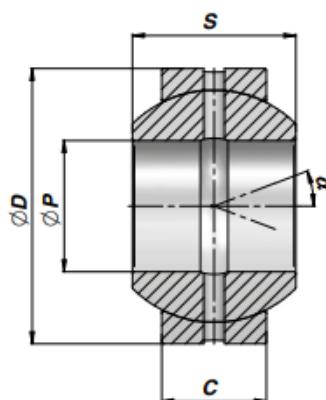

Codice Code	ØP	ØD	S	C	α	FC (kN)	kg
*05.CGE00.0001474	12	26	15	9	18	17.0	0.03
05.CGE00.0001475	15	30	16	10	16	21.2	0.04
05.CGE00.0001476	17	35	20	12	19	30.0	0.07
05.CGE00.0001477	20	42	25	16	17	48.0	0,15
05.CGE00.0001478	25	47	28	18	17	62.0	0,19
05.CGE00.0001479	30	55	32	20	17	80.0	0,29
05.CGE00.0001480	35	62	35	22	16	100.0	0,39
05.CGE00.0001481	40	68	40	25	17	127.0	0,52
05.CGE00.0001482	45	75	43	28	15	156.0	0,68
05.CGE00.0001483	50	90	56	36	17	245.0	1,40
05.CGE00.0001484	60	105	63	40	17	315.0	2,00
05.CGE00.0001485	70	120	70	45	16	400.0	2,90
05.CGE00.0001486	80	130	75	50	14	490.0	3,50
05.CGE00.0001487	90	150	85	55	15	610.0	5.40
05.CGE00.0001488	100	160	85	55	14	655.0	5.90
05.CGE00.0001489	110	180	100	70	12	950.0	9.70
05.CGE00.0001490	120	210	115	70	16	1080.0	15.00
05.CGE00.0001491	140	230	130	80	16	1370.0	18.50
05.CGE00.0001492	160	260	135	80	16	1530.0	25.00
05.CGE00.0001493	180	290	155	100	14	2120.0	35.50

FC = CARICO DINAMICO AMMESSO - MAX DYNAMIC LOAD

* = NON RILUBRIFICABILE - WITHOUT GREASE NIPPLE

ACCOPIAMENTO - COUPLING: ACCIAIO/ACCIAIO - STEEL/STEEL

MATERIALE: ACCIAIO ISO 12240-1 SERIE G / MATERIAL: STEEL ISO 12240-1 SERIES G