


CSTAPR...CE

TERMINALE A SNODO RILUBRIFICABILE

BALL-JOINT END WITH GREASE NIPPLE

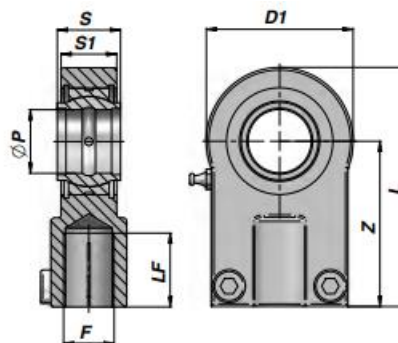

Codice Code	ØP	Z	S	D1 max	S1 max	L	F	LF min	FC (kN)	kg
* 05.CSTAPR.612C00	12	38	12	33.0	11.0	54	M12x1.2 5	17	10.8	0,11
05.CSTAPR.616C00	16	44	16	41.0	14.0	64	M14x1.5	19	17.6	0,20
05.CSTAPR.620C00	20	52	20	48.0	17,5	77	M16x1.5	23	30.0	0,35
05.CSTAPR.625C00	25	65	25	59.5	22.0	96	M20x1.5	29	48.0	0,62
05.CSTAPR.632C00	32	80	32	72.0	28.0	118	M27x2	37	67.0	1,15
05.CSTAPR.640C00	40	97	40	91.5	34.0	146	M33x2	46	100.0	2,18
05.CSTAPR.650C00	50	120	50	110.5	42.0	179	M42x2	57	156.0	3,96
05.CSTAPR.663C00	63	140	63	137.5	53.5	213	M48x2	64	255.0	6,80
05.CSTAPR.670C00(**) (A)	70	160	70	158.0	58.0	245	M56x2	76	315.0	9,60
05.CSTAPR.680C00 (**)	80	180	80	171.5	68.0	270	M64x3	86	400.0	13.00
05.CSTAPR.690C00 (**) (A)	90	195	90	187.0	73.0	296	M72x3	91	490.0	19.10
05.CSTAPR.695C00 (**)	100	210	100	212.5	85.5	322	M80x3	96	610.0	25.00
05.CSTAPR.696C00 (**) (A)	110	235	110	237.0	89.0	364	M90x3	106	655.0	32.00
05.CSTAPR.697C00 (**)	125	260	125	268.0	105.0	406.5	M100x3	113	950.0	46.00

FC = CARICO DINAMICO AMMESSO - MAX DYNAMIC LOAD

* = NON RILUBRIFICABILE - WITHOUT GREASE NIPPLE / (A) = FUORI NORMATIVA - OUT OF RULE

MATERIALE: ACCIAIO DIN 24338 - ISO 6982 - ISO 8132 - (**) = GHISA SFEROIDALE / MATERIAL: STEEL DIN 24338 - ISO 6982 - ISO 8132
(**)=MODULAR CAST IRON