



# CSTS N

TERMINALE A SNODO RILUBRIFICABILE

BALL-JOINT END WITH GREASE  
NIPPLE

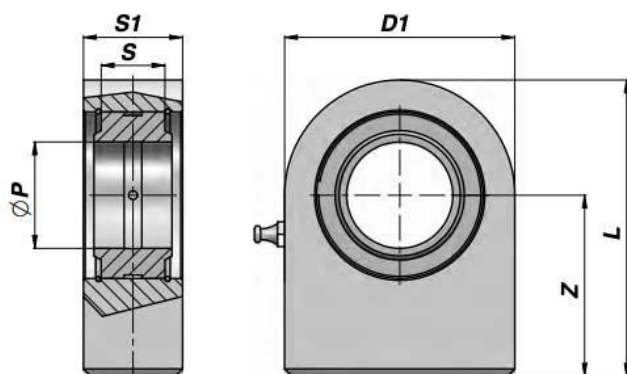

| Codice<br>Code      | ØP  | Z   | S  | D1  | S1   | L     | FC<br>( kN ) | kg    |
|---------------------|-----|-----|----|-----|------|-------|--------------|-------|
| *05.CSTS0.015N00    | 15  | 31  | 12 | 45  | 16,0 | 53.5  | 17.0         | 0,22  |
| 05.CSTS0.016N00 (A) | 16  | 35  | 14 | 48  | 17.5 | 59,0  | 21.2         | 0,29  |
| 05.CSTS0.017N00     | 17  | 35  | 14 | 48  | 17.5 | 59,0  | 21.2         | 0,29  |
| 05.CSTS0.020N00     | 20  | 38  | 16 | 50  | 19,0 | 63,0  | 30.0         | 0,36  |
| 05.CSTS0.025N00     | 25  | 45  | 20 | 55  | 23,0 | 72,5  | 48.0         | 0,53  |
| 05.CSTS0.030N00     | 30  | 51  | 22 | 65  | 28,0 | 83.5  | 62.0         | 0,85  |
| 05.CSTS0.035N00     | 35  | 61  | 25 | 83  | 30,0 | 102.5 | 80.0         | 1.50  |
| 05.CSTS0.040N00     | 40  | 69  | 28 | 100 | 35,0 | 119.0 | 100.0        | 2,42  |
| 05.CSTS0.045N00     | 45  | 77  | 32 | 110 | 40,0 | 132.0 | 127.0        | 3,39  |
| 05.CSTS0.050N00     | 50  | 88  | 35 | 123 | 40,0 | 149,5 | 156.0        | 4,24  |
| 05.CSTS0.060N00     | 60  | 100 | 44 | 140 | 50,0 | 170.0 | 245.0        | 7.10  |
| 05.CSTS0.070N00     | 70  | 115 | 49 | 164 | 55,0 | 197.0 | 315.0        | 10.70 |
| 05.CSTS0.080N00     | 80  | 141 | 55 | 180 | 60,0 | 231.0 | 400.0        | 15.10 |
| 05.CSTS0.090N00 (1) | 90  | 150 | 60 | 226 | 65,0 | 263.0 | 490.0        | 23.40 |
| 05.CSTS0.100N00 (1) | 100 | 170 | 70 | 250 | 70,0 | 295.0 | 610.0        | 33.10 |
| 05.CSTS0.110N00 (1) | 110 | 185 | 70 | 295 | 80,0 | 332.5 | 655.0        | 48.50 |
| 05.CSTS0.120N00 (1) | 120 | 210 | 85 | 360 | 90,0 | 390.0 | 950.0        | 79.50 |

\* = NON RILUBRIFICABILE - WITHOUT GREASE NIPPLE

FC = CARICO DINAMICO AMMESSO - MAX DYNAMIC LOAD

MATERIALE: ACCIAIO ISO 12240-4 SERIE E - TIPO S

(1) = PANTOGRAFATI - PROFILE PLATE

(A) = FUORI NORMATIVA - OUT OF RULE

MATERIAL : STEEL ISO 12240-1 SERIES E