


CSTAPR...U

TERMINALE A SNODO RILUBRIFICABILE
BALL-JOINT END WITH GREASE NIPPLE

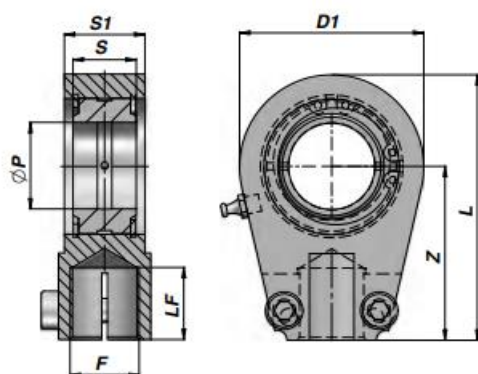

Codice Code	ØP	Z	S	D1 max	S1 max	L	F	LF min	FC (kN)	kg
05.CSTAPR.020U00	20	50	16	58.0	19.0	80	M16x1.5	17	30	0,44
05.CSTAPR.025U00	25	50	20	58.0	23.5	80	M16x1.5	17	48	0,47
05.CSTAPR.030U00	30	60	22	66.0	28.5	94	M22x1.5	23	62	0,77
05.CSTAPR.035U00	35	70	25	80.0	30.5	112	M28x1.5	29	80	1,24
05.CSTAPR.040U00	40	85	28	96.0	35.5	135	M35x1.5	36	100	2,12
05.CSTAPR.050U00	50	105	35	118.0	40.5	168	M45x1.5	46	156	3,74
05.CSTAPR.060U00	60	130	44	132.0	50.5	200	M58x1.5	59	245	6,49
05.CSTAPR.070U00	70	150	49	157.0	55.5	232	M65x1.5	66	315	9,88
05.CSTAPR.080U00	80	170	55	179.0	60.5	265	M80x2	81	400	14.20
05.CSTAPR.090U00(**)	90	210	60	208.0	65.5	322	M100x2	101	490	20.00
05.CSTAPR.100U00(**)	100	235	70	233.5	70.5	360	M110x2	111	610	27.50
05.CSTAPR.110U00(**)	110	265	70	268.0	80.5	407.5	M120x3	125	655	45.60
05.CSTAPR.120U00(**)	120	310	85	345.0	90.5	490	M130x3	135	950	72.00

FC = CARICO DINAMICO AMMESSO - MAX DYNAMIC LOAD

MATERIALE: ACCIAIO ISO 12240-1 SERIE E - (**) = GHISA SFEROIDALE / MATERIAL: STEEL ISO 12240-1 SERIES E - (**) = NODULAR CAST IRON