
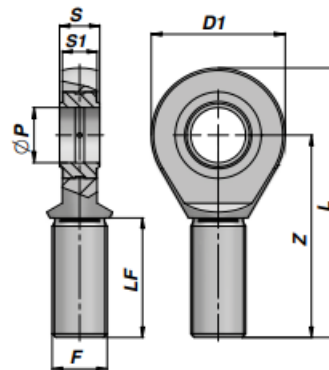


CSTFE...UK

TERMINALE A SNODO NON RICHIEDENTE MANUTENZIONE

MAINTENANCE FREE BALL-JOINT



Codice Code	ØP	Z	S	D1	S1	L	F	LF min	FC (kN)	kg
05.CSTF0.1106UK	6	36	6	21	4,3	46.5	M6x1	18	3.6	0,01
05.CSTF0.1108UK	8	42	8	24	6.0	54.0	M8x1.25	22	5.8	0,03
05.CSTF0.1110UK	10	48	9	29	7.0	62.5	M10x1.5	27	8.6	0,05
05.CSTF0.1112UK	12	54	10	34	8.0	71.0	M12x1.75	30	11.4	0,08
05.CSTF0.1115UK	15	63	12	40	10.0	83.0	M14x2	34	17.6	0,14
05.CSTF0.1117UK	17	69	14	46	11.0	92.0	M16x2	36	22.4	0,19
05.CSTF0.1120UK	20	78	16	53	13.0	104.5	M20x1.5	43	31.5	0,31
05.CSTF0.1125UK	25	94	20	64	17.0	126.0	M24x2	53	51.0	0,56
05.CSTF0.1130UK	30	110	22	73	19.0	146.5	M30x2	65	65.5	0,89

FC = CARICO DINAMICO AMMESSO - MAX DYNAMIC LOAD

MATERIALE: ACCIAIO ISO 12240-4 SERIE E TIPO M / MATERIAL: STEEL ISO 12240-4 SERIES E TYPE M