
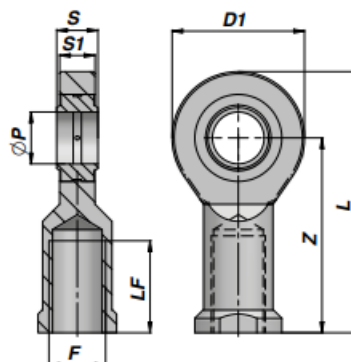


CSTFI...UK2RS

TERMINALE A SNODO NON RICHIEDENTE MANUTENZIONE

MAINTENANCE FREE BALL-JOINT



Codice Code	ØP	Z	S	D1	S1	L	F	LF min	FC (kN)	kg
05.CSTF0.1017U2	17	67	14	46	11.0	90.0	M16x2	34	22.4	0,22
05.CSTF0.1020U2	20	77	16	53	13.0	103.5	M20x1.5	40	31.5	0,35
05.CSTF0.1025U2	25	94	20	64	17.0	126.0	M24x2	48	51.0	0,64
05.CSTF0.1030U2	30	110	22	73	19.0	146.5	M30x2	56	65.5	0,93
05.CSTF0.1035U2	35	125	25	82	21.0	166.0	M36x3	60	112.0	1,30
05.CSTF0.1040U2	40	142	28	92	23.0	188.0	M39x3	67	140.0	2,01
05.CSTF0.1045U2	45	145	32	102	27.0	196.0	M42x3	65	180.0	2,50
05.CSTF0.1050U2	50	160	35	112	30.0	216.0	M45x3	69	220.0	3,50
05.CSTF0.1060U2	60	175	44	135	38.0	242.0	M52x3	73	345.0	5,50
05.CSTF0.1070U2	70	200	49	160	42.0	280.0	M56x4	80	440.0	8,60
05.CSTF0.1080U2	80	230	55	180	47.0	320.0	M64x4	85	570.0	12.00

FC = CARICO DINAMICO AMMESSO - MAX DYNAMIC LOAD

MATERIALE: ACCIAIO ISO 12240-4 SERIE E TIPO F / MATERIAL: STEEL ISO 12240-4 SERIES E TYPE F