

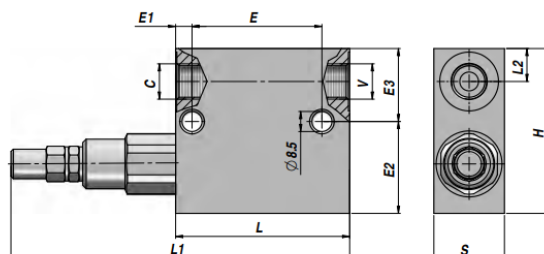


VS2C

VALVOLA DI SEQUENZA SEQUENCE VALVE



Codice Code	C BSP	V BSP	Q MAX l/min	P MAX bar	Tipo Type	L	L1	L2	E	E1	E2	E3	H	S	kg
05.VS2C0.1390.0660	1/2"	1/2"	70	350	VS2C 1/2" C	80	152	15.0	55.0	7.0	37	33	70	30	1,13
05.VS2C0.1390.0665	3/4"	3/4"	110	400	VS2C 3/4" D	100	164	20	80	10.0	50	50	100	40	2,90
05.VS2C0.1390.0640	3/8"	3/8"	35	350	VS2C 3/8" C	74	146	14	55,0	7.0	39	31	70.0	30	1,17

Your need. Our speed.

MOLLA - SPRING VS2C 3/8"- 1/2": A= 10:50 bar - B= 20:100 bar - C= 30:180 bar (Standard) - D= 50:250 bar - E= 80:300 bar

MATERIALE CORPO: ACCIAIO/ BODY MATERIAL: STEEL

MONTAGGIO IN LINEA/ LINE MOUNTING