



1 SCLL

TUBO FLESSIBILE LONG LIFE - EN 857-1SC
LONG LIFE FLEXIBLE HYDRAULIC HOSE - EN 857-1SC

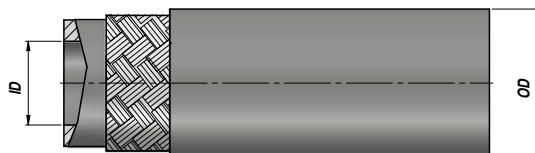

Codice Code	ID				OD mm	P MAX bar		BR min mm	Temperatura d'esercizio Working temperature	Colore Colour	Ghiera Ferrule	kg x 100 m
	size	inch	mm	DN		Esercizio Work	Scoppio Burst					
05.FGHE0.201K05	05	5/16"	8.0	08	13.5	250	1000	55	-40°C - +120°C (135° intermittente	Nero	05.RPG00.001C05	21,00
05.FGHE0.201K06	06	3/8"	9.5	10	15.7	250	1000	60	intermittent)	Black	05.RPG00.001C06	24,80

BR min = Raggio minimo di curvatura - Minimum bending radius

Sottostrato - Internal hose : Gomma sintetica, estrusa senza giunzioni e di spessore uniforme - Synthetic rubber, extruded whole without joints, of uniform thickness

Rinforzo - Reinforcement : 1 Treccia in acciaio ad alta resistenza - 1 High tensile steel wire braids

Copertura - Cover : Gomma liscia sintetica resistente agli oli, all'abrasione e agli agenti atmosferici - Oil, abrasion and weather resistant smooth synthetic rubber