


LMP211

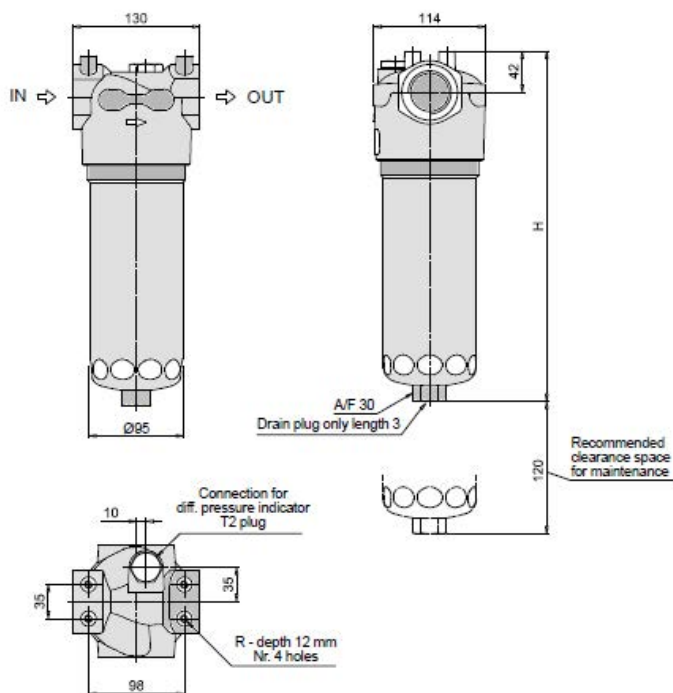

LMP211	
Filter length	H [mm]
1	358
2	488
3	629
Connections	R
A-B-C	M8
D-E-F-G-H-I	5/16" UNC

Codice

Codice

05.LMPO0.002112

FILTRO LINEA BASSA PRESSIONE 10 mic

05.CU0000.002102


ELEM.FILTR.RICAMBIO MICROFIBRA 10 MIC

Codice


Codice

05.LMPO0.002112


INDICATORE DIFFERENZIALE ELETTRICO VISIVO

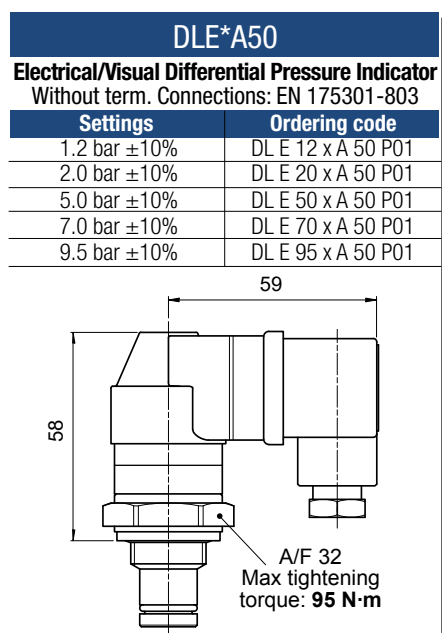

Hydraulic



Electrical symbol



Materials

- Body: Brass
- Base: Black polyamide
- Contacts: Silver
- Seal: HNBR - FPM

Technical data

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943
- Degree protection: IP65 according to EN 60529

Electrical data

- Electrical connections: EN 175301-803
- Resistive load: 5 A / 250 Vac
- Available the connector with lamps