


QUADRING - X RING

Statiche

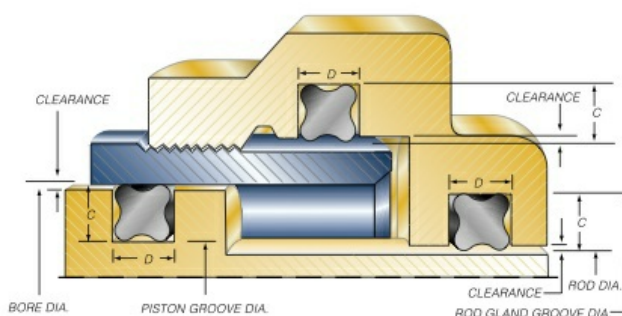

Materiale	Velocita' m/s:	Temperatura ??C:	Pressione Mpa:
Epdm	DINAM. 0,5 - ROTAZ. 2	-40 +160	DIPENDE CONDIZ. ESERC.
Epdm/perox	DINAM. 0,5 - ROTAZ. 2	-40 +140	DIPENDE CONDIZ. ESERC.
Ffkm	DINAM. 0,5 - ROTAZ. 2	-25 +270	DIPENDE CONDIZ. ESERC.
Fluorsilicone	DINAM. 0,5 - ROTAZ. 2	-60 +190	DIPENDE CONDIZ. ESERC.
Hnbr	DINAM. 0,5 - ROTAZ. 2	-30 +150	DIPENDE CONDIZ. ESERC.
Nbr	DINAM. 0,5 - ROTAZ. 2	-30 +100	DIPENDE CONDIZ. ESERC.
Pu	DINAM. 0,5 - ROTAZ. 2	-35 +100	DIPENDE CONDIZ. ESERC.
Silicone	DINAM. 0,5 - ROTAZ. 2	-60 +200	DIPENDE CONDIZ. ESERC.
Viton	DINAM. 0,5 - ROTAZ. 2	-15 +200	DIPENDE CONDIZ. ESERC.
Epdm/perox/fda	DINAM. 0,5 - ROTAZ. 2	-40 +120	DIPENDE CONDIZ. ESERC.
Silicone fda	DINAM. 0,5 - ROTAZ. 2	-60 +200	DIPENDE CONDIZ. ESERC.

Codice	Descrizione	d	D	Spessore	Materiale	Peso
01.QRARV.008000	QRAR04008-V7002 008-2018 D.004,48x1,78	4.48	0.00	1.78	Viton	0.00
01.QRAR0.021800	QUAD-RING NBR 90SH 218-4125 (JF4-23) D.031,34x3,53	31.34	0.00	3.53	Nbr	1.00
01.QRARV.219000	QRAR04219-V7002 219-4131 D.032,92x3,53	32.92	0.00	3.53	Viton	0.00
01.QRAR0.220000	QRAR04220-N7004 NBR 70SH 220-4137 D.034,52x3,53	34.52	0.00	3.53	Viton	0.00
01.QRAR0.222000	QRAR04222-N7004 NBR 70SH 222-4150 D.037,69x3,53	37.69	0.00	3.53	Viton	0.00