


GE LO

SNODO SFERICO RADIALE RICHIEDENTE MANUTENZIONE

RADIAL BALL-JOINT REQUIRING MAINTENANCE

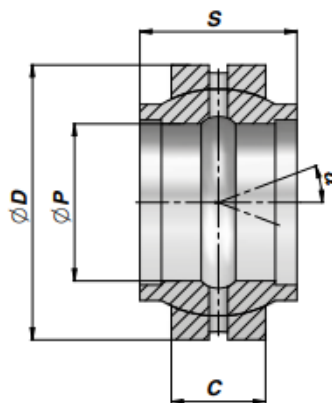

Codice Code Type LO	ØP	ØD	S	C	α	FC (kN)	kg
05.CGE00.0001445	12	22	12	7	4	10.8	0,02
05.CGE00.0001446	16	28	16	9	4	17.6	0,03
05.CGE00.0001447	20	35	20	12	4	30.0	0,07
05.CGE00.0001448	25	42	25	16	4	48.0	0,12
05.CGE00.0001449	32	52	32	18	4	67.0	0,20
05.CGE00.0001450	40	62	40	22	4	100.0	0,34
05.CGE00.0001451	50	75	50	28	4	156.0	0,56
05.CGE00.0001452	63	95	63	36	4	255.0	1,20
05.CGE00.0001453	70	105	70	40	4	315.0	1,70
05.CGE00.0001454	80	120	80	45	4	400.0	2,40
05.CGE00.0001455	90	130	90	50	4	490.0	3,20
05.CGE00.0001456	100	150	100	55	4	610.0	4,80
05.CGE00.0001457	110	160	110	55	4	655.0	5,80
05.CGE00.0001458	125	180	125	70	4	950.0	8,50

FC = CARICO DINAMICO AMMESSO - MAX DYNAMIC LOAD

ACCOPIAMENTO - COUPLING: ACCIAIO/ACCIAIO - STEEL/STEEL

MATERIALE: ACCIAIO ISO 12240-1 SERIE W / MATERIAL: STEEL ISO 12240-1 SERIES W