


GE UK2RS

SNODO SFERICO RADIALE NON RICHIEDENTE MANUTENZIONE

MAINTENANCE FREE RADIAL BALL-JOINT

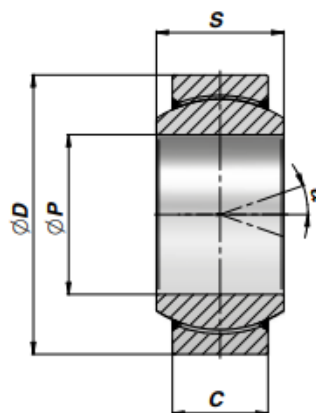

Codice Code	ØP	ØD	S	C	a	FC Type UK2RS (kN)	kg
05.CGE00.0001525	17	30	14	10	10	48	0.03
05.CGE00.0001526	20	35	16	12	9	68	0.06
05.CGE00.0001527	25	42	20	16	7	130	0.11
05.CGE00.0001528	30	47	22	18	6	170	0.14
05.CGE00.0001529	35	55	25	20	6	220	0.22
05.CGE00.0001530	40	62	28	22	7	280	0.30
05.CGE00.0001531	45	68	32	25	7	360	0.40
05.CGE00.0001532	50	75	35	28	6	440	0.54
05.CGE00.0001533	60	90	44	36	6	690	1.00
05.CGE00.0001534	70	105	49	40	6	880	1.50
05.CGE00.0001535	80	120	55	45	6	1135	2.20
05.CGE00.0001536	90	130	60	50	5	1375	2.70
05.CGE00.0001537	100	150	70	55	7	1725	4.30
05.CGE00.0001538	110	160	70	55	6	1860	4.70
05.CGE00.0001539	120	180	85	70	6	2700	8.00
05.CGE00.0001540	140	210	90	70	7	3010	11.00
05.CGE00.0001541	160	230	105	80	8	3840	13.50
05.CGE00.0001542	180	260	105	80	6	4320	18.50
05.CGE00.0001543	200	290	130	100	7	6000	28.00

FC = CARICO DINAMICO AMMESSO - MAX DYNAMIC LOAD

ACCOPIAMENTO - COUPLING: CROMO DURO/PTFE - HARD CHROMIUM/PTFE

MATERIALE: ACCIAIO ISO 12240-1 SERIE E / MATERIAL: STEEL ISO 12240-1 SERIES E