
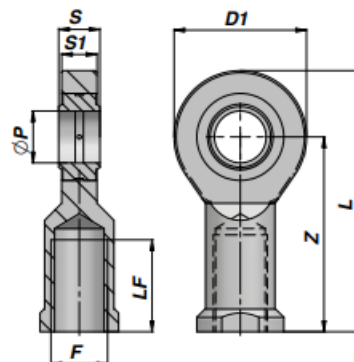


## CSTFI...UK

TERMINALE A SNODO NON RICHIEDENTE MANUTENZIONE

MAINTENANCE FREE BALL-JOINT



| Codice<br>Code  | ØP | Z   | S  | D1 | S1   | L     | F        | LF<br>min | FC<br>( kN ) | kg   |
|-----------------|----|-----|----|----|------|-------|----------|-----------|--------------|------|
| 05.CSTF0.1006UK | 6  | 30  | 6  | 21 | 4,3  | 40.5  | M6x1     | 11        | 3.6          | 0,02 |
| 05.CSTF0.1008UK | 8  | 36  | 8  | 24 | 6.0  | 48.0  | M8x1.25  | 15        | 5.8          | 0,04 |
| 05.CSTF0.1010UK | 10 | 43  | 9  | 29 | 7.0  | 57.5  | M10x1.5  | 20        | 8.6          | 0,06 |
| 05.CSTF0.1012UK | 12 | 50  | 10 | 34 | 8.0  | 67.0  | M12x1.75 | 24        | 11.4         | 0,09 |
| 05.CSTF0.1015UK | 15 | 61  | 12 | 40 | 10.0 | 81.0  | M14x2    | 30        | 17.6         | 0,18 |
| 05.CSTF0.1017UK | 17 | 67  | 14 | 46 | 11.0 | 90.0  | M16x2    | 34        | 22.4         | 0,22 |
| 05.CSTF0.1020UK | 20 | 77  | 16 | 53 | 13.0 | 103.5 | M20x1.5  | 40        | 31.5         | 0,35 |
| 05.CSTF0.1025UK | 25 | 94  | 20 | 64 | 17.0 | 126.0 | M24x2    | 48        | 51.0         | 0,64 |
| 05.CSTF0.1030UK | 30 | 110 | 22 | 73 | 19.0 | 146.5 | M30x2    | 56        | 65.5         | 0,93 |

FC = CARICO DINAMICO AMMESSO - MAX DYNAMIC LOAD

MATERIALE: ACCIAIO ISO 12240-4 SERIE E TIPO F / MATERIAL: STEEL ISO 12240-4 SERIES E TYPE F